


THE WDS GROUP

GRIP-TAINER®
TOTAL CONFIDENCE

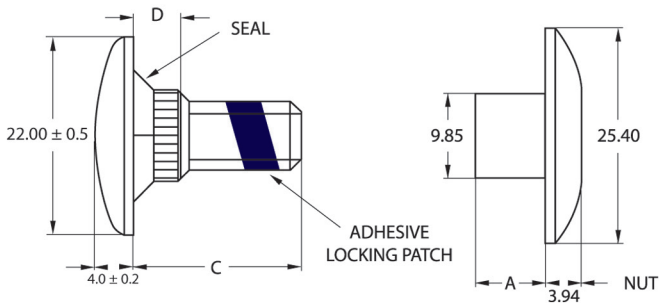

Bolt Dimensions

Part No	Seal	C	D
00B		14.00	5.50
0B		16.00	5.50
0B		16.00	5.50
0B		16.00	5.50
1B		19.05	6.60
1B		19.05	6.60
2B		22.20	6.60
2B		22.20	6.60
2B		22.20	6.60
3B		25.40	9.50
3B		25.40	9.50
3B		25.40	9.50
4B		31.75	9.50
4B		31.75	9.50
4B		31.75	9.50
4B		31.75	9.50
5B		38.50	12.30
5B		38.50	12.30
5B		38.50	12.30

Nut Dimensions

Part No	A
N0	7.00
N0	7.00
N1	9.52
N2	12.70
N1	9.52
N2	12.70
N1	9.52
N2	12.70
N3	15.87
N1	9.52
N2	12.70
N3	15.87
N1	9.52
N2	12.70
N3	15.87
N4	25.80
N2	12.70
N3	15.87
N4	25.80

Grip Range

Min	Max
13.00	14.90
14.50	15.60
15.50	17.40
18.50	20.50
17.90	19.70
20.00	23.50
21.30	23.10
20.60	25.60
23.20	27.20
24.50	25.90
24.50	28.70
25.80	30.40
31.20	32.60
31.20	34.20
31.20	36.50
35.80	42.50
37.70	40.30
37.70	43.20
39.40	50.30

Features

- Controlled clamp
- No expensive tooling
- No waste material
- Reusable
- High specification plating
- Powder coated on request
- Plastic encapsulated heads on request
- Colour coded seals

GRIP-TAINER Technical Data

Recommended hole size:	10.3mm
Thread:	5/16 UNC
Shear strength:	14 Kn
Tensile strength:	20 Kn
Recommended assembly torque:	17-20 Nm
Drive bit:	T55



1357 The Horsley Drive, Wetherill Park, NSW 2164

p: 1300 937 349 f: 02 9725 1622 e: sales@wds.com.au w: www.wds.com.au